

Customization is available  
Products and specifications are  
subject to be changed without notice



[www.ep-ep.com](http://www.ep-ep.com)

## Electric Pallet Truck

### Option:

- Battery tray
- Special in-line caster for rough ground
- “creep” switch
- Single or double load wheel
- Easy charging plug
- Two speed on operating handle
- Entry and exist rollers
- Double pallet long forks
- 4-bolt caster
- Industry battery
- Maintenance free battery
- Hand set
- Grease fitting
- BDI & hour meter



EPT-20-20E



EPT-20-13M



EPT-20-20EW



EPT-20-20A



EPT-20-20W

### E-P Equipment Co.,LTD

Let's grow together...  
E-P Equipment is a specialized manufacturer of material handling equipment.

**China:**  
**E-P EQUIPMENT CO., LTD**  
No. 121 YongHua Street, Shi Qiao Road,  
Xia Cheng Qu Hangzhou, China  
Tel: 86-571-28035676/28035633/28035657/28035653  
Fax: 86-571-28035665  
Email: [info@ep-ep.com](mailto:info@ep-ep.com)

**USA:**  
**E-P EQUIPMENT, USA CORP.**  
1865 E.Main St.  
Suite F, Duncan, SC 29334  
Tel: 1-864-486-8774  
Fax: 1-864-486-8779  
Toll Free: 866-373-8722  
E-mail: [info@ep-ep.com](mailto:info@ep-ep.com)


**Japan:**  
**E-P EQUIPMENT JAPAN**  
#105 2-16-10 Hirao, Inagi-shi  
Tokyo 206-0823 Japan  
Tel: 81-42-3506422  
Fax: 81-42-3506423  
E-mail: [ep-japan@ep-ep.com](mailto:ep-japan@ep-ep.com)

[www.ep-ep.com](http://www.ep-ep.com)

**Korea:**  
**E-P EQUIPMENT KOREA**  
1058-Ra Dong, Buck Yi-Dong,  
Ilsan/Gu, Koyang/Shi, Kyunggi/Du,  
Korea  
Tel: 82-31-9254100  
Fax: 82-31-9254102  
E-mail: [ep@ep-ep.co.kr](mailto:ep@ep-ep.co.kr)



*Let's grow together*  
**ISO9001**

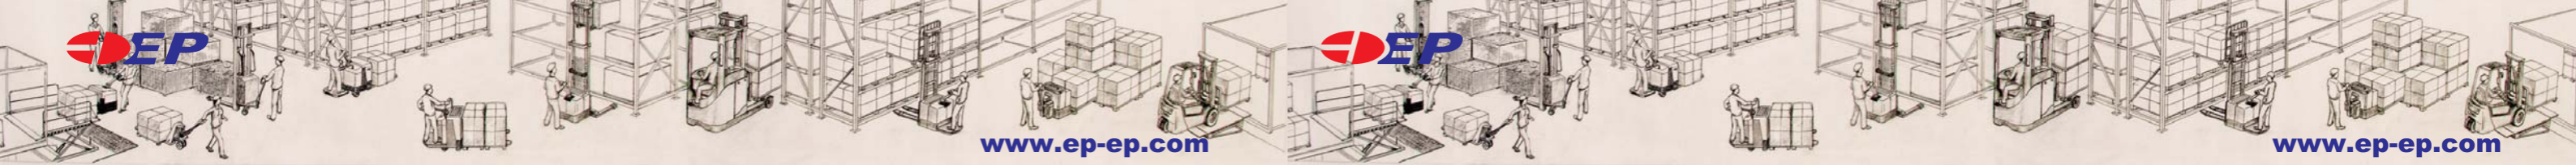

**Specifications:**

MODEL			EPT-20-13M		EPT-20-20W		EPT-20-20EW			
			540	685	540	685	540	685		
1	<b>Characteristics</b>	Capacity	kg	1300		2000		2000		
2		Operator type		Walkie						
3		Wheel (Drive/Load)		Polyurethane/Polyurethane						
4		Wheel quantity		1D+4L/1D+2L						
5	<b>Specifications</b>	Maximum speed	Laden	km/h	4.6		4.6		3	
			Unladen		5.9		5.9		3.5	
Maximum lifting speed		Laden	m/s	0.056		0.051		0.056		
		Unladen		0.060		0.060		0.06		
Maximum lowering speed		Laden	m/s	0.057		0.052		0.057		
		Unladen		0.059		0.059		0.059		
8		Gradeability	Laden	%	5		5		5	
			Unladen		7		7		7	
9	<b>Dimensions</b>	Lifting height	mm	120		120		120		
10		Ground clearance+fork thickness	mm	85		85		85		
11		Raised height	mm	194/205		205		205		
12		Overall length (unfolded)	mm	1570	1620	1802	1850	1680	1730	
13		Fork length	mm	1150	1200	1150	1200	1150	1200	
14		Body length (folded)	mm	420		652		530		
15		Overall width	mm	704		764		750		
16		Overall fork width	mm	540	685	540	685	540	685	
17		Min. outside turning radius	mm	1384	1434	1617	1667	1500	1570	
18		Fork width	mm	160		185		185		
19		Aisle width (800*1200mm pallet): horizontal/vertical	mm	1540	1720	1600	2000			
20	Aisle width (1000*1200mm pallet): horizontal/vertical	mm	1720	1720	1800	2000				
21	Max battery size (L*W*H)	mm	280*178*280		650*215*587					
22	<b>Driving system</b>	Battery type	V/Ah	Maintenance Free	Industry		Industry			
23		Voltage/Capacity	kw	24/60		24/210		24/210		
24		Driving motor	kw	0.6		0.93		1.35		
25		Lifting motor	kw	0.8		2.2		2		
26		Control system		Curtis 1243						
27		Traveling brake		Regenerate						
28		Packing brake		Electromagnetic	Mechanical		Electromagnetic			

**Specifications:**

MODEL			EPT-20-20E		EPT-20-20A			
			540	685	540	685		
1	<b>Characteristics</b>	Capacity	kg	2000		2000		
2		Operator type		Rider				
3		Wheel (Drive/Load)		Polyurethane/Polyurethane				
4		Wheel quantity		1D+4L/1D+2L				
5	<b>Specifications</b>	Maximum speed	Laden	km/h	6		6	
			Unladen		8		8	
Maximum lifting speed		Laden	m/s	0.056		0.056		
		Unladen		0.060		0.060		
Maximum lowering speed		Laden	m/s	0.057		0.057		
		Unladen		0.059		0.059		
8		Gradeability	Laden	%	5		5	
			Unladen		7		7	
9	<b>Dimensions</b>	Lifting height	mm	120		120		
10		Ground clearance+fork thickness	mm	85		85		
11		Raised height	mm	205		205		
12		Overall length (unfolded)	mm	2210	2260	2077	2127	
13		Fork length	mm	1150	1200	1150	1200	
14		Body length (folded)	mm	710		927		
15		Overall width	mm	802		802		
16		Overall fork width	mm	540	685	540	685	
17		Min. outside turning radius	mm	1655	1705	1872	1922	
18		Fork width	mm	185		185		
19		Aisle width (800*1200mm pallet): horizontal/vertical	mm	1636	2563	1630	2245	
20	Aisle width (1000*1200mm pallet): horizontal/vertical	mm	1836	2563	1838	2245		
21	Max battery size (L*W*H)	mm	608*274*480					
22	<b>Driving system</b>	Battery type	V/Ah	Industry				
23		Voltage/Capacity	kw	24/210				
24		Driving motor	kw	2.2				
25		Lifting motor	kw	2				
26		Control system		Curtis 1243				
27		Traveling brake		Regenerate				
28		Packing brake		Electromagnetic				